


# FCoE Dual Port 10Gbps Ethernet to PCIe Converged Network Adapter (CNA)

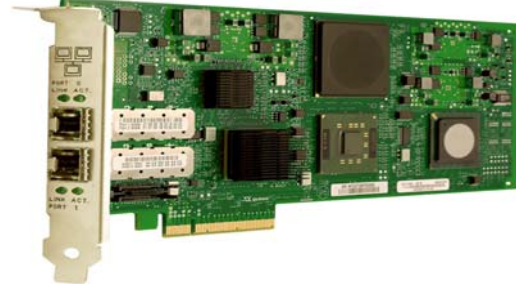

## High Performance

10Gbps maximum throughput for high bandwidth storage (SAN) and networking (LAN) traffic

Full hardware offload for FCoE protocol processing

150,000 IOPS per port deliver high I/O transfer rates for storage applications

Full support for TCP/IP and Ethernet performance enhancements such as priority-based flow control (802.1Qbb), jumbo frames, checksum offloads, and segmentation offloads

## Lower Total Cost of Ownership (TCO)

Reduced hardware, cabling, power, cooling, and management costs through convergence of data and storage networking

Preservation of familiar data and storage concepts resulting in lower training and administrative costs

## Investment Protection

Works seamlessly with existing Fibre Channel (FC) storage

Communicates via Ethernet, the most common networking technology in the world

Compatible with existing FC and networking drivers that have been deployed in millions of existing systems

## Fibre Channel over Ethernet (FCoE) Technology.

FCoE provides an opportunity to reduce data center costs by converging data and storage networking. Standard TCP/IP and Fibre Channel traffic can both run on the same high speed 10Gbps Ethernet wire, resulting in cost savings through reduced adapter, switch, cabling, power, cooling, and management requirements. FCoE has gained rapid market traction because it delivers excellent performance, reduces data center TCO, and protects current data center investment.

**High Performance.** The QLE8042 boosts system performance with 10Gbps speed and full hardware offload for FCoE protocol processing. Cutting edge 10Gbps bandwidth eliminates performance bottlenecks in the I/O path with a 10X data rate improvement versus existing 1Gbps Ethernet solutions. Additionally, full hardware offload for FCoE protocol processing reduces system CPU utilization for I/O operations, which leads to faster application performance and higher levels of consolidation in virtualized systems.

**Lower TCO.** The QLE8042 reduces data center costs through convergence. Now, one CNA can do the work of a discrete FC Host Bus Adapter (HBA) and Ethernet NIC. This convergence also means fewer cables, fewer switches, less power consumption, reduced cooling, and easier management. The QLE8042 also preserves familiar FC concepts such as WWNs, FC-IDs, LUN masking, and zoning, thereby eliminating training costs that would be required for a new storage technology.

**Investment Protection.** The QLE8042 and FCoE are designed to preserve existing investment in Fibre Channel storage and core Ethernet switches and routers for data networking. The QLE8042 leverages the same identical software and driver stacks that have been deployed and battle-hardened in millions of previous installations.

**Unmatched Expertise.** QLogic has an unparalleled advantage in delivering this new CNA technology. QLogic is the undisputed leader in both FC and iSCSI HBAs, with years of experience providing FC and Ethernet based products. While some competitors have expertise in either networking or storage, no other I/O provider can match QLogic's expertise in FC and Ethernet hardware and software solutions.

## QLogic EMC Dedicated EMC Account Team

Chris Murphy	Business Development - East	617-733-6627	chris.murphy@qlogic.com
David Spiros	Business Development - West	408-204-9084	david.spiros@qlogic.com
Michael Picard	Sales Engineer, on-site Hopkinton	508-450-8028	michael.picard@qlogic.com
Joe Muniz	Sr. Outbound Marketing Manager	949-230-3088	joe.muniz@qlogic.com
Paul Giovinazzo	Sales Manager	978-618-9891	paul.giovinazzo@qlogic.com



## QLE8042 Dual Port 10Gbps Ethernet to PCIe Converged Network Adapter (CNA)

### Host Bus Interface Specifications

**Bus interface:** PCI Express x8  
**Hardware platforms** IA32 (x86); Intel64, AMD64 (x64)  
**Compliance** PCI Express Base Specification, rev. 1.0a, PCI Express Card Electromechanical Specification, rev. 1.0, PCI Bus Power Management Interface Specification, rev. 1.1

### Ethernet Specifications

**Throughput** 10Gbps full duplex line rate

**Topology** Any 10Gb Ethernet Network

**Ethernet Frame** 1500 byte or 9600 byte (Jumbo Frame)

**Stateless offload** IP, TCP, and UDP checksum offloads Large Send Offload (LSO)

### Enhanced Ethernet

Priority-based flow control (802.1Qbb) DCBX protocol (802.1Qaz)

### Compliance

IEEE: 802.3ae (10Gb Ethernet), 802.1q (VLAN), 802.3ad (Link Aggregation), 802.1p (Priority Encoding), 802.3x (Flow Control), 802.3ap (KX/KX4), 802.3ak (CX4), IEEE 1149.1 (JTAG), IPv4 Specification (RFC 791), IPv6 Specification (RFC 2460), TCP/UDP Specification (RFC 793/768), ARP Specification (RFC 826)

### FCoE Specifications

**Performance** 150,000 IOPS per port  
**Logins** Support for 512 concurrent logins and 1024 active exchanges per port  
**Class of service** Class 3

**Protocols** FCP (SCSI-FCP), FC-TAPE (FCP-2)

### Compliance

SCSI-3 Fibre Channel Protocol (SCSI-FCP), Fibre Channel Tape (FC-TAPE) profile, SCSI Fibre Channel Protocol-2 (FCP-2), Second Generation FC Generic Services (FC-GS-2), Third Generation FC Generic Services (FC-GS-3)

### Tools and Utilities

**Management tools** SANsurfer® FC HBA Manager (GUI and CLI) Intel® PROSet for Windows Device Manager

**Device utilities** Utilities for programming boot code; Linux® scripting tools

**Boot support** BIOS

### APIs

SNIA HBA API V2, SMI-S, and FDMI NDIS 5.x, NDIS 6.x, and WMI

### Operating systems

Windows Server® 2003, Windows Server 2008, Red Hat® AS 4.x and 5.x, Novell® SLES 10.x

### Physical Specifications

**Ports** Dual 10Gbps Ethernet

**Connections** Small form factor plugable (SFP+)

**Form factor** Standard height PCI Express card: 24.13 cm × 11.12 cm (9.50 in. × 4.376 in.)

### Environment and Equipment Specifications

**Airflow** 100 LFM

### Temperature

Operating: 0°C/32°F to 55°C/131°F  
 Storage: -20°C/-4°F to 70°C/158°F

### Humidity

Relative (non-condensing): 10% to 90%  
 Storage: 5% to 95%

### Power dissipation

22.0W (nominal, QLE8042-SR)

### Cable Distances

Cable Type	Optical	Copper
Description	SR	Twinax
Distance	300m	10m

### Agency Approvals—Product Safety

#### US/Canada

UL60950-1; CSA C22.2 60950-1

#### Europe

EN60950-1:2001+A11; EN60825-1:1994+A1+A2; EN60825-2:2004

### Agency Approvals—EMI and EMC

#### US/Canada

FCC CFR Title 47, Part 15, Subpart B:2006 Class A; ICES-003:2004 Class A

#### Europe

EN55022:2006 Class A;  
 EN55024:1998; EN61000-3-2:2006; EN61000-3-3:1995

#### Asia/Pacific

VCCI:2007-04 Class A (Japan), MIC (Korea), AS/NZS: CISPR 22:2006 Class A (Australia/NZ), BSMI CNS

### Ordering Information

#### **QLE8042-CK Ships without transceivers**

**(Direct Attached —SFP+ twinax copper cables sold separately; check with your FCoE switch vendor for details.)**

**QLE8042-SR-CK Ships with two SR optical transceivers**

**All -CK parts ship in an individually packed box with a CD and Quick Start Guide.**

[http://www.qlogic.com/Solutions/OEM\\_EMC.aspx](http://www.qlogic.com/Solutions/OEM_EMC.aspx)



**Corporate Headquarters** QLogic Corporation 26650 Aliso Viejo Parkway Aliso Viejo, CA 92656 949.389.6000 [www.qlogic.com](http://www.qlogic.com)

**Europe Headquarters** QLogic (UK) Ltd. Surrey Technology Centre 40 Occam Road Guildford Surrey GU2 7YG UK +44 (0) 1483 295825

© 2008 QLogic Corporation. Specifications are subject to change without notice. All rights reserved worldwide. QLogic, the QLogic logo, SANbox, Enterprise Fabric Suite, StarPower, Designed to the Core, and HyperStack are trademarks or registered trademarks of QLogic Corporation. All other brand and product names are trademarks or registered trademarks of their respective owners. Information supplied by QLogic is believed to be accurate and reliable. QLogic assumes no responsibility for errors in this material. QLogic reserves the right, without notice, to make changes in product design or specifications.